




DELTA ANDREAE

Filter Classification: CEN-EN 779:
Media: Layers of paper punched, pleated and glued
Market: Industrial
Details: Auto Industry, paint spray applications

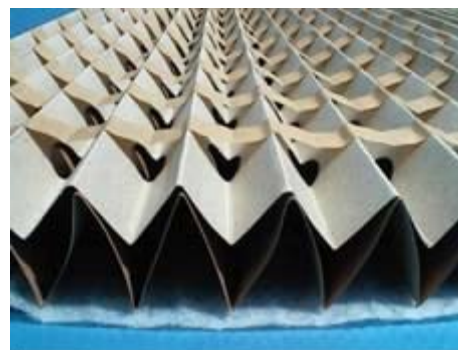

Technical Details

| <i>Type</i> | | ANDREAE STANDARD | | | |
|----------------------------------|---------------------------------|---------------------------|---------------------------|-------------------|--|
| 2 layers of kraft paper | | | | | |
| Holding Capacity : | To 18 kg/m ² | | | | |
| Filter Efficiency: | To 98,1% | | | | |
| Flame retardant: DIN 53438 F1/K1 | | | | | |
| Height | 75 cm | 90 cm | 90 cm * | 100 cm | |
| Area | 10m ² | 8,35 m ² | 10 m² * | 10 m ² | |
| | Code | Code | Code | Code | |
| Brown | DPB AF711 | DPB AF811 | DPB AF911 | DPB AF111 | |
| White | DPW AF713 | DPW AF813 | DPW AF913 | DPW AF113 | |
| <i>Type</i> | | ANDREAE ECOFILTERS | | | |
| 2 layers of kraft paper | | | | | |
| Holding Capacity : | To 18 kg/m ² | | | | |
| Filter Efficiency: | To 98,1% | | | | |
| Height | 75 cm | 90 cm | 90 cm * | 100 cm | |
| Area | 10m ² | 8,35 m ² | 10 m² * | 10 m ² | |
| | Code | Code | Code | Code | |
| Brown | DPB EF711 | DPB EF811 | DPB EF911 | DPB EF111 | |
| ANDREAE Type | STANDARD | | ECOFILTERS | | |
| Recommended air velocity | 0,5 to 1 m/s | | 0,5 to 1 m/s | | |
| Pressure Drop at 0,5 m/s | 13 Pa | | 13 Pa | | |
| Pressure Drop at 0,75 m/s | 30 Pa | | 30 Pa | | |
| Pressure Drop at 1 m/s | 56 Pa | | 56 Pa | | |
| Final Pressure Drop | 130 Pa (maximum 250 Pa) | | | | |

* most common type

Andere types: other types available on request

Contact Details

Delta Filtration, Kilmallock Business Park, Kilmallock, Co. Limerick, Ireland

Tel : +353 63 98829 | Fax : +353 63 98830 | E-mail : info@deltafiltration.com | Web : www.deltafiltration.com