




Leading Provider of Next Generation Air Filters

## DELTA ULTRASEAL BAG - Glass Fibre

**Filter Classification:** CEN-EN 779: F5 – F9  
**Media:** Glass fibre, overlapped stitch  
**Frame:** Corrosion Resistant Metal in 20mm and 25mm frame  
**Maximum airflow:** 4250 m<sup>3</sup>/hr  
**Final pressure loss:** 450Pa (recommended)  
**Rated airflow:** 3600 m<sup>3</sup>/hr  
**Market:** HVAC | Food/Beverage  
 Industrial | Pharma/Cleanroom

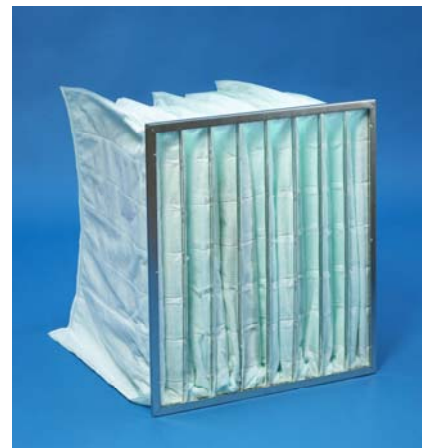

### Technical Details

Part. Number	Dimensions	Filter Class	No. pockets	Media area (m <sup>2</sup> )	Flowrate (m <sup>3</sup> /hr)	Pressure (Pa)
GBF5592592600-6(x,y)	592 x 592 x 600	F5	6	4.5	3400	55
GBF5490592600-5(x,y)	490 x 592 x 600	F5	5	3.6	2850	55
GBF5287592600 -3(x,y)	287 x 592 x 600	F5	3	2.4	1700	55
GBF6592592600 -8(x,y)	592 x 592 x 600	F6	8	6.0	3400	72
GBF6490592600-6(x,y)	490 x 592 x 600	F6	6	4.5	2850	72
GBF6287592600-4(x,y)	287 x 592 x 600	F6	4	3.0	1700	75
GBF7592592600-8(x,y)	592 x 592 x 600	F7	8	6.0	3400	117
GBF7592592600-6(x,y)	490 x 592 x 600	F7	6	4.5	2850	127
GBF7287592600-4(x,y)	287 x 592 x 600	F7	4	3.0	1700	117
GBF8592592600-8(x,y)	592 x 592 x 600	F8	8	6.0	3400	200
GBF8592592600-6(x,y)	490 x 592 x 600	F8	6	4.5	2850	200
GBF8287592600-4(x,y)	287 x 592 x 600	F8	4	3.0	1700	200
GBF9592592600-8(x,y)	592 x 592 x 600	F9	8	6.0	3400	210
GBF9592592600-6(x,y)	490 x 592 x 600	F9	6	4.5	2850	210
GBF9287592600-4(x,y)	287 x 592 x 600	F9	4	3.0	1700	210

### Contact Details

Delta Filtration, Kilmallock Business Park, Kilmallock, Co. Limerick, Ireland

**Tel :** +353 63 98829 | **Fax :** +353 63 98830 | **E-mail :** info@deltafiltration.com | **Web :** www.deltafiltration.com